

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Patent Application

Inventors: Terry Si-Fong CHENG  
Ching Yao HUANG

Docket No.: 2925-141P

Lucent Case No.: CHENG 6-2

Title: CDMA POWER CONTROL FOR PAGING AND INITIAL TRAFFIC CHANNEL  
POWER

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

Date: September 30, 1998

Sir:

Enclosed are the following papers relating to the above-named application for  
patent:

Specification

Formal Drawings ( 3 sheets)

Declaration and Power of Attorney

The fee has been calculated as shown below:

CLAIMS AS FILED				
	NO. FILED	NO. EXTRA	RATE	CALCULATIONS
Total Claims	26 - 20 =	6	x \$22. =	\$132.00
Independent Claims	6 - 3 =	3	x \$82. =	\$246.00
Multiple Dependent Claim(s), if applicable			x \$270. =	
BASIC FEE				\$790.00
			<b>TOTAL FEE</b>	<b>\$1168.00</b>

Please address all correspondence to:

Telephone inquiries may be directed to the undersigned representative at (703) 205-8000.

BIRCH, STEWART, KOLASCH & BIRCH, LLP

Attorney for Applicant

# CDMA POWER CONTROL FOR PAGING AND INITIAL TRAFFIC CHANNEL POWER

## FIELD OF THE INVENTION

### Technical Field

The present invention relates to CDMA power control for dynamically determining optimum paging and initial traffic channel power to reduce call origination failure in a mobile communication system.

### 5 Description of the Background Art

Call origination failure in conventional CDMA (code division multiple access) mobile communication systems typically occurs when the mobile station fails to receive a base station (BS) acknowledgment signal, a channel assignment message (CAM), a forward acknowledgment (FW) signal or a service connecting (SC) message. Table 1 lists  
10 the failure rate of each of the above-noted call origination failures. The BS acknowledgment failure (34.38% failure rate) is the major reason for call origination failure. BS acknowledgment failure occurs when a mobile station transmits an access probe to a base station to request a connection from the mobile communication system and the forward paging channel power from the base station to the mobile station is  
15 insufficient such that an acknowledgment is not received at the base station.

TABLE 1

	No BS ACK	No CAM	No FW ACK	NO SC	Other
Failure Rate %	34.38	9.38	31.25	20.31	4.69

IS-95-B is a mobile-to-base station compatibility standard for dual-mode wide band spread spectrum. The access probe handoff is an IS-95-B scheme for improving call origination failure by performing a handoff to another paging channel when a mobile station loses a paging channel. However, the access probe handoff fails to fundamentally  
20 resolve a base station acknowledgment failure. For example, the access probe handoff merely determines which paging channel to switch to and thus provides no adjustment of paging channel power. The access probe handoff fails when the forward link power of the paging channels is insufficient.

Generally, base station acknowledgment failure may be reduced by increasing  
25 paging channel power. Currently, the average DGU (digital gain unit) for a traffic channel is in the range of 67-75 and the constant DGU set for the paging channel is 64. Table 2

lists call origination failure rates derived from field test results for a baseline case of paging channel DGU = 64, initial traffic channel DGU = 80, T50m = 0.2 seconds and T51m = 1.0 second. In this example, a time limit of T51m = 1.0 second is set for the mobile station to report to the base station the receipt of two good traffic channel frames transmitted from the base station. The second good traffic channel frame must be received within a time limit of T50m = 0.2 seconds after the first good traffic channel frame. If a report acknowledging receipt of two good traffic channel frames is not sent to the base station within T51m=1.0 second after the mobile station tunes to the particular traffic channel, the call is dropped. In the baseline case, 13.03% of all calls failed and 4.48% of all calls failed due to base station acknowledgment failure, which is 34.38% of all the failed calls.

TABLE 2

	CASE	Actual rate %	Failure %	No BS ACK %	No CAM %	No FW ACK %	NO SC %	Other %
0	Baseline	13.03(100)		4.48(34.38)	1.22(9.38)	4.07(31.25)	2.65(20.31)	0.61(4.69)
1	PG DGU=90 Traffic DGU=108	13.38(100)		2.12(15.87)	1.06(7.94)	7.86(58.73)	1.70(12.70)	0.64(4.76)
2	T50m=1 sec T51m=2.8 sec	10.14(100)		3.86(38.10)	0.97(9.52)	0.72(7.14)	2.66(26.19)	1.93(19.05)
3	PG DGU=90 Traffic DGU=108 T50m=1sec T51m=2.8 sec	7.26(100)		1.21(16.67)	0.4(5.56)	2.42(33.33)	3.02(41.67)	0.02(2.78)

The test results of Table 2 show that increased paging channel DGU improves base station acknowledgment failure rate by more than 50%, as can be appreciated in view of Case 1 as compared to the baseline case. However, increased paging channel power can have a negative impact on mobile communication system capacity in terms of system power budget. As more power is allocated to the paging channel, less power is available for traffic channels. Also, system noise increases as paging channel power increases, which contributes to increased interference. As can be further appreciated in view of Case 1, although increased paging channel power reduces base station acknowledgment failure rate, forward signal acknowledgment failure rate increases significantly due to increased

interference. This results in a reduction of about 2.5 forward link users. To alleviate this negative impact, the T50m and T51m time limits may be increased as in Case 2, such that base station acknowledgment failure rate may be improved. However, this approach is impractical since the mobile units must be serviced to change the T50m and T51m time limits.

#### SUMMARY OF THE INVENTION

In the present invention, paging channel power and initial traffic channel power are determined in accordance with current RF conditions and are dynamically set so that channel power can be increased when RF conditions are poor and decreased when RF conditions are good. The present invention determines optimum paging channel power and initial traffic channel power in accordance with pilot signal strength of a pilot signal received at a mobile station and current forward link loading of the base station. The base station then transmits a paging message or a call to the mobile station over a paging channel and a traffic channel at the determined optimum paging channel power and the determined optimum initial traffic channel power.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 illustrates a mobile communication system of a preferred embodiment of the present application;

Fig. 2 illustrates base station 30 of Fig. 1 in greater detail; and

Fig. 3 illustrates message switching center 40 of Fig. 1 in greater detail.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 1 illustrates a CDMA mobile communication system of a preferred embodiment of the present application. As illustrated in Fig. 1, the mobile communication system includes a plurality of base stations 30, 31 and 32 which transmit and receive communication signals to/from mobile station 10. Although not illustrated, each of base stations may cover respective sectors. Mobile switching center 40 is coupled to the plurality of base stations 30-32 via communication lines L and is further coupled to public switched telephone network

(PSTN) 50 to enable communication between mobile station 10 and another party on PSTN 50. Although three respective base stations are illustrated, it is to be understood that the mobile communication system may include any number of base stations.

Fig. 2 illustrates base station 30 in greater detail. Transceiver 303 transmits and receives RF signals to/from mobile station 10 via antenna 301. Transceiver 303 and antenna 301 may be any conventional transceiver and antenna and may function in a conventional duplexing mode to enable transmission and reception of the RF signals. In the alternative, transceiver 303 may be replaced with a separate transmitter and receiver pair and antenna 301 may include a transmission antenna and a reception antenna. Transceiver 303 demodulates and filters RF signals received from mobile station 10 via antenna 301 and provides the corresponding demodulated received signal to controller 305. Transceiver 303 also modulates and amplifies a transmission signal provided from controller 305 and provides the modulated transmission signal to antenna 301 for transmission as an RF signal to mobile station 10.

Base station 30 further includes transceiver 309 which transmits and receives signals to/from mobile switching center 40 via communication lines L. Transceiver 309 may be any conventional transceiver as would be known by one of ordinary skill. In an alternative embodiment, transceiver 309 may comprise a transmitter and receiver pair for transmitting and receiving signals to/from message switching center 40 over a pair of communication lines L.

Operation of base station 30 is controlled by controller 305 in a manner which will be subsequently described. Controller 305 may be a microprocessor which controls operation of base station 30 in accordance with software programming stored in memory 307. As would be readily understood by one of ordinary skill, controller 305 may in the alternative comprise various discreet hardware circuit elements and should not necessarily be limited as microprocessor-based. In addition to storing operating programs for base station 30, memory 307 also includes working memory which may be used by controller 305.

Fig. 3 illustrates mobile switching center 40 in greater detail. Transceiver 401 is coupled to communication lines L to receive and transmit signals from/to the base stations 30-32. Transceiver 401 may be any conventional transceiver usable in a mobile switching

center as would be understood by one of ordinary skill. In an alternative embodiment, transceiver 401 may comprise a transmitter and receiver pair for transmitting and receiving signals separately over a pair of communication lines L. The operation of mobile switching center 40 is controlled by controller 403 as will be described subsequently in greater detail.

- 5 Controller 403 may be microprocessor-based and may function to control operation of mobile switching center 40 in accordance with software programming stored within memory 405. Memory 405 may also include working memory area usable by controller 403. Controller 403 is also coupled to PSTN 50.

Operation of a preferred embodiment of the present application will now be described

- 10 with reference to Figs. 1-3. The following notation is used throughout the description.  $\frac{Ec}{Io}$  is the pilot power or pilot signal strength of a pilot signal received at the mobile station.  $L_F$  is the current forward link loading of a base station within the desired sector. The current forward link loading is derived as the ratio of the current transmitted power of the base station to the maximum transmitted power of the base station.  $L_F$  may be determined by
- 15 controller 305 of base station 30 based on the  $\frac{Ec}{Io}$  of the pilot signal as reported by the base station. The maximum transmitted power of a base station is typically 8 watts.  $T_{pilot}$  is the transmitted pilot power from a base station of the desired sector and is set usually at 15-20% of the maximum transmitted power of the base station.  $F_{pilot}$  is the fraction of transmitted pilot power to transmitted maximum power of a base station and is typically 15%.  $P_{pilot}$  is
- 20 received pilot power at the mobile station.  $\left(\frac{Eb}{No}\right)_p$  is the required quality of the paging channel, or in other words the required bit energy level of the paging channel.  $\left(\frac{Eb}{No}\right)_t$  is the required quality of the traffic channel, or in other words the required bit energy level of the traffic channel.  $\left(\frac{Eb}{No}\right)_p$  and  $\left(\frac{Eb}{No}\right)_t$  are usually set at 7dB, but may be conservatively set to 9dB if desired. It is to be understood that the values given above are exemplary and may be
- 25 set as desired and thus should not be considered as limiting.

0916396-093098





Substituting equation (3) into equation (2) results in the following:

$$\frac{I_{out}}{P_{pilot}} = \left( \frac{Ec}{Io} \right)^{-1} - \frac{L_F}{F_{pilot}} \equiv A \dots\dots\dots(4).$$

From equation (4),  $I_{out} = P_{pilot} \times A$ , so that the ratio of external interference to internal interference of other cells plus noise may be expressed as:

$$\frac{I_{out}}{I_{in}} = \frac{P_{pilot} \times A}{P_{pilot} \times \frac{L_F}{F_{pilot}}} = \frac{A \times F_{pilot}}{L_F} \dots\dots\dots(5).$$

- 5 The required received paging channel power  $P_{page}$  may be expressed in terms of target quality  $\left( \frac{Eb}{No} \right)_p$  as:

$$P_{page} = \left( \frac{Eb}{No} \right)_p \times (O \times I_{in} + I_{out}) \dots\dots\dots(6),$$

- wherein O is the orthogonal factor for internal interference. Since Walsh codes are used in a CDMA mobile communication system, the channels of the respective sectors are orthogonal and thus do not interfere with each other during demodulation. However, 10 multipath signals from a single source exist in a CDMA mobile communication system. Even if the multipath signals are transmitted at the same time, they will not be received by the mobile station at the same time due to time delays caused by reflection from objects. The corresponding received channel therefore may not be exactly orthogonal, therefore increasing internal interference. The orthogonal factor provides a measure of internal 15 interference due to multipath. Typically, the orthogonal factor may be set to 0.1 or 0.2.

- Equations (6) and (7) express the required received paging channel power  $P_{page}$  in terms of the required quality of the paging channel  $\left( \frac{Eb}{No} \right)_p$  and internal and external interference. The ratio of required received paging channel power  $P_{page}$  to internal interference  $I_{in}$  generated within the sector is equivalent to the ratio of required transmitted 20 paging channel power  $T_{page}$  to current transmitted power  $T_{in}$  generated within the sector because the propagation loss between the base station and the mobile station at a given instant are the same. This relationship may be expressed as:

$$\frac{T_{\_page}}{T_{\_in}} = \frac{P_{\_page}}{I_{\_in}} \dots\dots\dots(7).$$

The required transmit paging channel power  $T_{\_page}$  may thus be solved for by substituting equation (6) into equation (7), so that

$$\frac{T_{\_page}}{T_{\_in}} = \frac{\left(\frac{Eb}{No}\right)p \times (O \times I_{\_in} + I_{\_out})}{I_{\_in}} \dots\dots\dots(8).$$

From equation (5),  $I_{\_out}$  may be expressed as:

$$I_{\_out} = I_{\_in} \times \frac{A \times F_{\_pilot}}{L_{\_F}} \dots\dots\dots(9).$$

Substituting equation (9) into equation (8) results in the following:

$$\frac{T_{\_page}}{T_{\_in}} = \left(\frac{Eb}{No}\right)p \times \left(O + \frac{A \times F_{\_pilot}}{L_{\_F}}\right) \dots\dots\dots(10),$$

5 which may be rearranged as:

$$T_{\_page} = T_{\_in} \times \left(\frac{Eb}{No}\right)p \times \left(O + \frac{A \times F_{\_pilot}}{L_{\_F}}\right) \dots\dots\dots(11).$$

$T_{\_in}$  may be expressed as:

$$T_{\_in} = L_{\_F} \times \frac{T_{\_pilot}}{F_{\_pilot}} \dots\dots\dots(12).$$

By substituting equation (11) into equation (12), the required transmitted paging channel power, or optimum initial paging channel power,  $T_{\_page}$  may finally be expressed as:

$$T_{\_page} = T_{\_pilot} \times \frac{L_{\_F}}{F_{\_pilot}} \times \left(\frac{Eb}{No}\right)p \times \left(O + \frac{A \times F_{\_pilot}}{L_{\_F}}\right) (13).$$

10 Since all the values of equation (13) are known or may be determined once the pilot signal strength of the pilot signal is reported by the mobile station, the required transmitted paging channel power for the corresponding RF and forwarding loading conditions may be determined by controller 305. Controller 305 then controls transceiver 303 to transmit the corresponding paging message over a paging channel to mobile station 10 via antenna 301 at the required transmitted paging channel power. Since the optimum paging channel power is determined dynamically in accordance with current RF conditions, paging  
15 channel power can be increased only when needed, to the extent needed. Likewise, paging

09162396-093099

channel power can be decreased when RF conditions permit. Thus, system power budget is allocated efficiently and generated interference is minimized.

In a further preferred embodiment, optimum paging channel power may be determined by controller 403 of mobile switching center 40 in accordance with software stored within memory 405. In this embodiment, the PSMM is generated by mobile station 10 and transmitted to base station 30. Base station 30 subsequently sends the PSMM to mobile switching center 40 via lines L. Controller 403 then determines the required transmitted paging channel power for base station 30 based upon the PSMM and current forward link loading of base station 30 as determined based on the reported pilot signal strength in accordance with equation (13) as described in the first embodiment. Controller 403 then directs transceiver 401 to send information indicative of the required transmitted paging channel power to base station 30, which thereafter transmits the paging message to mobile station 10 over a paging channel at the required transmitted paging channel power. An advantage of this embodiment is that paging channel power may be controlled and set by mobile switching center 40 without base station software and resources.

In a still further embodiment, optimum initial traffic channel power may be determined in accordance with the pilot signal strength as reported from the mobile station as follows:

$$T\_traffic = T\_pilot \times \frac{L\_F}{F\_pilot} \times \left( \frac{Eb}{No} \right)_t \times \left( O + \frac{A \times F\_pilot}{L\_F} \right) \quad (14).$$

Equation (14) is the same as equation (13), except that the required quality of the traffic channel  $\left( \frac{Eb}{No} \right)_t$  is used in equation (14) instead of the required quality of the paging channel  $\left( \frac{Eb}{No} \right)_p$  of equation (13). As in the first and second embodiments, the required traffic channel power may be determined at base station 30 or may be determined at mobile switching center 40.

It is to be understood that the programming necessary for carrying out processing described in accordance with the above-noted embodiments is not to be limited as stored within memories 307 and 405 of base station 30 and mobile switching center 40 of Figs. 2

and 3, respectively. The programming may be recorded on a computer readable medium such as a floppy disk or CD ROM readable by controller 305 and 403 of base station 30 and mobile switching center 40, respectively. In a further alternative, the programming may be transmitted to controller 305 of base station 30 from mobile switching center 40 via propagated signal along line L.

It is also to be understood that the power control for paging channel power and initial traffic channel power should not necessarily be limited in view of the corresponding figures, description exemplary values. For example, the values of maximum transmitted power,

$T_{\text{pilot}}$ ,  $F_{\text{pilot}}$ ,  $\left(\frac{E_c}{N_o}\right)_t$ ,  $\left(\frac{E_c}{N_o}\right)_p$  and orthogonal factor  $O$  may be preset by the service

provider and may be stored within memories 307 and 405. Moreover, although controller 305 of base station 30 and controller 403 of mobile switching center 40 are described as microprocessor-based which function in accordance with software programming respectively stored in memories 307 and 305, controllers 405 and 403 may be discrete circuit elements including multipliers and adders or logical gate arrays. Furthermore, controllers 305 and 403 may have memories incorporated therein such that memories 307 and 405 of Figs. 2 and 3 are not necessary. Also, power control for initial paging channel and initial traffic channel power as described should not necessarily be limited to CDMA systems, but may be applicable to any mobile communication system as may be appropriate.

1. A base station of a mobile communication system comprising:  
a transmitter that wirelessly transmits a pilot signal and a paging message to a mobile station of the mobile communication system; and  
a controller that determines optimum paging channel power in accordance with pilot signal strength of the pilot signal wirelessly received by the mobile station,  
said transmitter wirelessly transmitting the paging message to the mobile station over a paging channel at the optimum paging channel power.

2. The base station of claim 1, wherein said controller determines optimum paging channel power in accordance with the pilot signal strength and forward loading of the base station,

the forward loading of the base station being a ratio of current transmitted power of the base station to maximum transmitted power of the base station .

3. The base station of claim 1, wherein said controller also determines an optimum initial traffic channel power in accordance with the pilot signal strength.

1           4.       The base station of claim 1, wherein the mobile communication system is  
2   CDMA mobile communication system.

5. A mobile switching center of a mobile communication system, the mobile switching center being supplied with indication of pilot signal strength of a pilot signal received wirelessly by a mobile station of the mobile communication system, the mobile switching center comprising:

a controller that determines optimum paging channel power for wireless transmission of a paging message to the mobile station in accordance with the pilot signal strength of the pilot signal.

6. The mobile switching center of claim 5, wherein said controller supplies information indicative of the optimum paging channel power to a base station of the

3 mobile communication system, the paging message being wirelessly transmitted from the  
4 base station to the mobile station at the optimum paging channel power.

1 7. The mobile switching center of claim 6, wherein said controller determines  
2 the optimum paging channel power in accordance with the pilot signal strength and  
3 forward loading of the base station,  
4 the forward loading of the base station being a ratio of current transmitted  
5 power of the base station to maximum transmitted power of the base station.

1 8. The mobile switching center of claim 5, wherein said controller also  
2 determines an optimum initial traffic channel power in accordance with the pilot signal  
3 strength.

1 9. The mobile switching center of claim 5, wherein the mobile communication  
2 system is a CDMA mobile communication system.

1 10. A method of controlling transmission power of a base station of a mobile  
2 communication system comprising the steps of:  
3 wirelessly transmitting a pilot signal to a mobile station of the mobile  
4 communication system;  
5 determining optimum paging channel power in accordance with pilot signal  
6 strength of the pilot signal wirelessly received by the mobile station; and  
7 wirelessly transmitting a paging message to the mobile station over a  
8 paging channel at the optimum paging channel power.

1 11. The method of controlling transmission power of claim 10, wherein said  
2 step of determining comprises determining optimum paging channel power in accordance  
3 with the pilot signal strength and forward loading of the base station,  
4 the forward loading of the base station being a ratio of current transmitted  
5 power of the base station to maximum transmitted power of the base station.

09163399.092399  
3502250" 95829160

1           12.    The method of controlling transmission power of claim 10, wherein the  
2   base station determines the optimum paging channel power.

1           13.    The method of controlling transmission power of claim 10, wherein a  
2   mobile switching center of the mobile communication system determines the optimum  
3   paging channel power.

1           14.    The method of controlling transmission power of claim 10, further  
2   comprising:

3                   determining optimum initial traffic channel power in accordance with the  
4   pilot signal strength; and

5                   wirelessly transmitting a call to the mobile station over a traffic channel at  
6   the optimum initial traffic channel power.

1           15.    The method of controlling transmission power of claim 10, wherein the  
2   mobile communication system is a CDMA mobile communication system.

3           16.    An article of manufacture taking the form of a computer-readable medium  
4   for controlling transmission power of a base station in a mobile communication system,  
5   the article of manufacture comprising:

6                   a pilot transmission source code segment for causing a computer within the  
7   base station to wirelessly transmit a pilot signal to a mobile station of the mobile  
8   communication system;

9                   a paging channel determination source code segment for causing the  
10   computer to determine an optimum paging channel power in accordance with pilot signal  
11   strength of the pilot signal wirelessly received by the mobile station; and

12                  a paging transmission source code segment for causing the computer to  
13   wirelessly transmit a paging message to the mobile station over a paging channel at the  
14   optimum paging channel power.

09163396, 0923098  
0360260, 96229160

1           17.    The article of manufacture of claim 16, wherein said paging channel  
2   determination source code segment causes the computer to determine the optimum paging  
3   channel power in accordance with the pilot signal strength and forward loading of the base  
4   station,

5                   the forward loading of the base station being a ratio of current transmitted  
6   power of the base station to maximum transmitted power of the base station.

1           18.    The article of manufacture of claim 16, further comprising:

2                   a traffic channel determination source code segment for causing the  
3   computer to determine an optimum initial traffic channel power in accordance with the  
4   pilot signal strength; and

5                   a traffic channel transmission source code segment for causing the  
6   computer to wirelessly transmit a call to the mobile station over a traffic channel at the  
7   optimum initial traffic channel power.

1           19.    The article of manufacture of claim 16, which controls transmission power  
2   of the base station in a CDMA mobile communication system.

1           20.    An article of manufacture taking the form of a computer readable medium  
2   for controlling transmission power of a base station of a mobile communication system,  
3   the article of manufacture comprising:

4                   a paging channel determination source code segment for causing a  
5   computer of a mobile switching center of the mobile communication system to determine  
6   optimum paging channel power in accordance with pilot signal strength of a pilot signal  
7   wirelessly received by a mobile station of the mobile communication system; and

8                   a paging channel transmission source code segment for causing the  
9   computer to direct a base station to wirelessly transmit a paging message to the mobile  
10   station over a paging channel at the optimum paging channel power.

0916239-0909  
"050260" 050260



1           21.    The article of manufacture of claim 20, wherein the paging channel  
2   determination source code segment causes the computer to determine the optimum paging  
3   channel power in accordance with the pilot signal strength and forwarding loading of the  
4   base station,  
5                the forward loading of the base station being a ratio of current transmitted  
6   power of the base station to maximum transmitted power of the base station.

1           22.    The article of manufacture of claim 20, further comprising:  
2                a traffic channel determination source code segment for causing the  
3   computer to determine optimum initial traffic channel power in accordance with the pilot  
4   signal strength of the pilot signal; and  
5                a traffic channel transmission source code segment for causing the  
6   computer to direct the base station to wirelessly transmit a call to the mobile station over a  
7   traffic channel at the optimum initial traffic channel power.

1           23.    The article of manufacture of claim 20, which controls transmission power  
2   in a CDMA mobile communication system.

1           ~~24.~~   A propagated signal embodied in a carrier wave for controlling  
2   transmission power of a base station of a mobile communication system, the propagated  
3   signal comprising:

4                a pilot transmission source code segment for causing a computer within the  
5   base station to wirelessly transmit a pilot signal to a mobile station of the mobile  
6   communication system;

7                a paging channel determination source code segment for causing the  
8   computer to determine an optimum paging channel power in accordance with pilot signal  
9   strength of the pilot signal wirelessly received by the mobile station; and

10              a paging transmission source code segment for causing the computer to  
11   wirelessly transmit a paging message to the mobile station over a paging channel at the  
12   optimum paging channel power.

09132360-092098

1           25.    The propagated signal of claim 24, wherein said paging channel  
2   determination source code segment causes the computer to determine the optimum paging  
3   channel power in accordance with the pilot signal strength and forward loading of the base  
4   station,  
5                   the forward loading of the base station being a ratio of current transmitted  
6   power of the base station to maximum transmitted power of the base station.

1           26.    The propagated signal of claim 24, further comprising:  
2                   a traffic channel determination source code segment for causing the  
3   computer to determine an optimum initial traffic channel power in accordance with the  
4   pilot signal strength; and  
5                   a traffic channel transmission source code segment for causing the  
6   computer to wirelessly transmit a call to the mobile station over a traffic channel at the  
7   optimum initial traffic channel power.

0916299-092098

**ABSTRACT OF THE DISCLOSURE**

1           A code-division multiple access power control for paging channel power and initial  
2 traffic channel power dynamically determines optimum initial channel power in  
3 accordance with pilot signal strength of a pilot signal as received at a mobile station and  
4 current forward link loading of the desired sector. The optimum initial paging channel  
5 power and initial traffic channel power may be determined either at a base station or a  
6 mobile switching center of the mobile communication system. A paging signal or call is  
7 transmitted from the base station to the mobile station over a paging channel and a traffic  
8 channel at the optimum paging channel and initial traffic channel power.

09163396-093098  
360E60"96E9T60

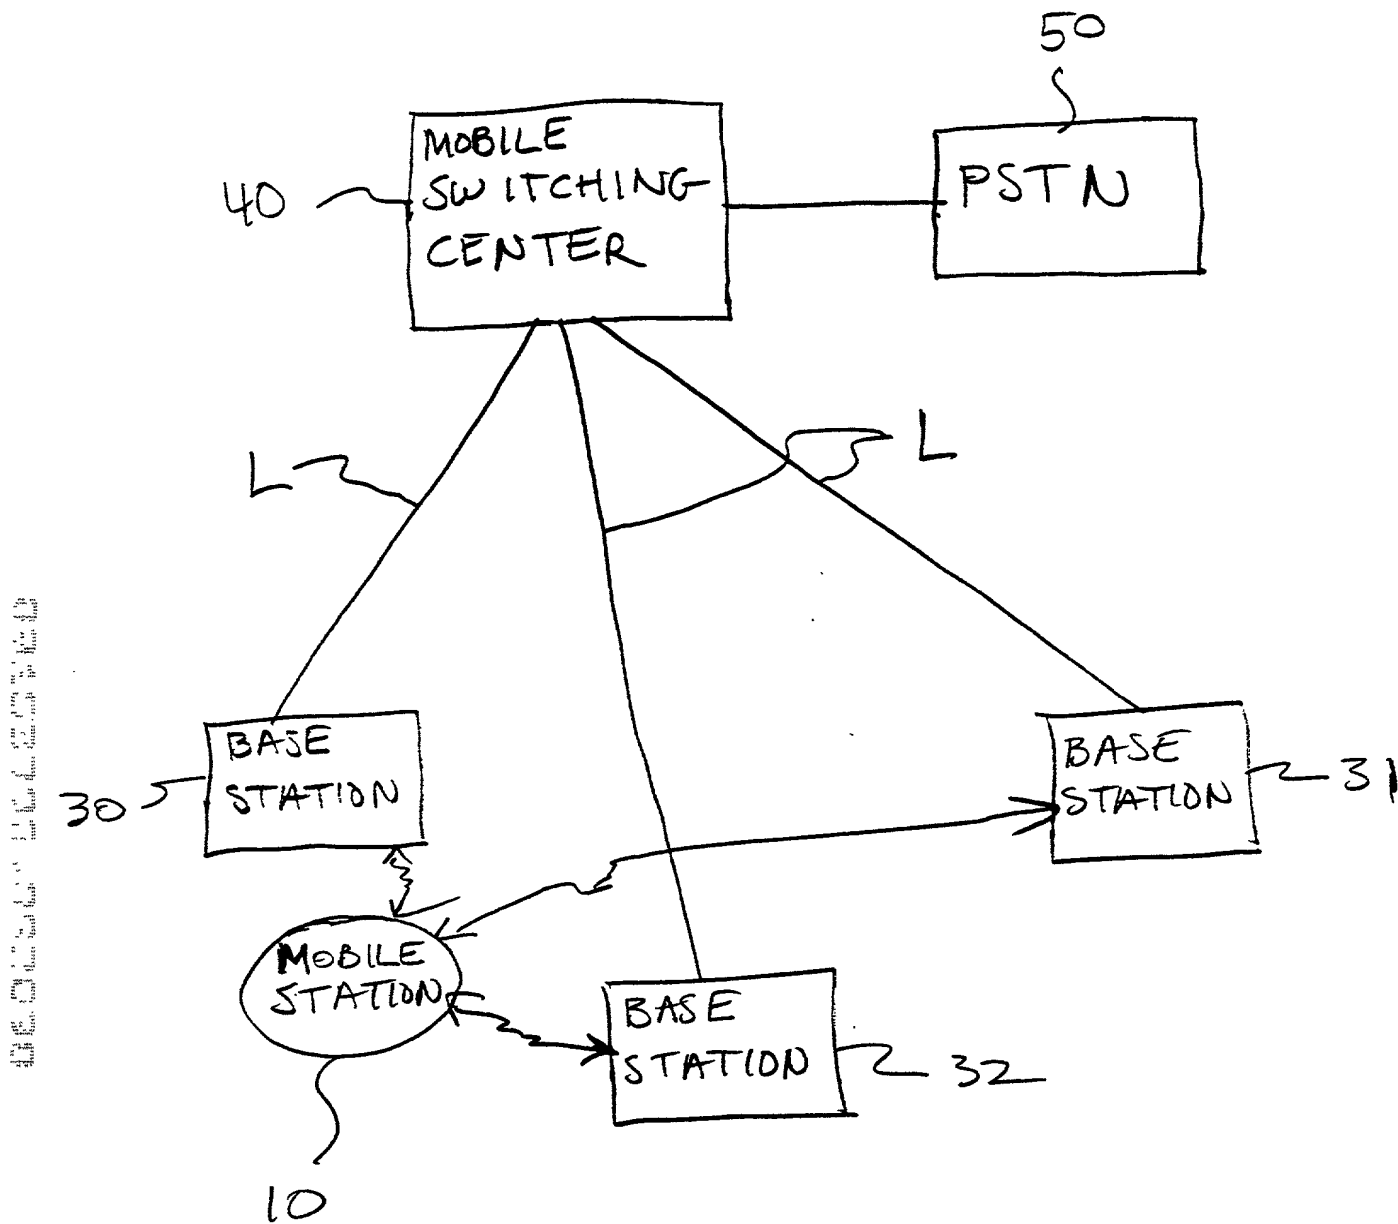


FIG-1

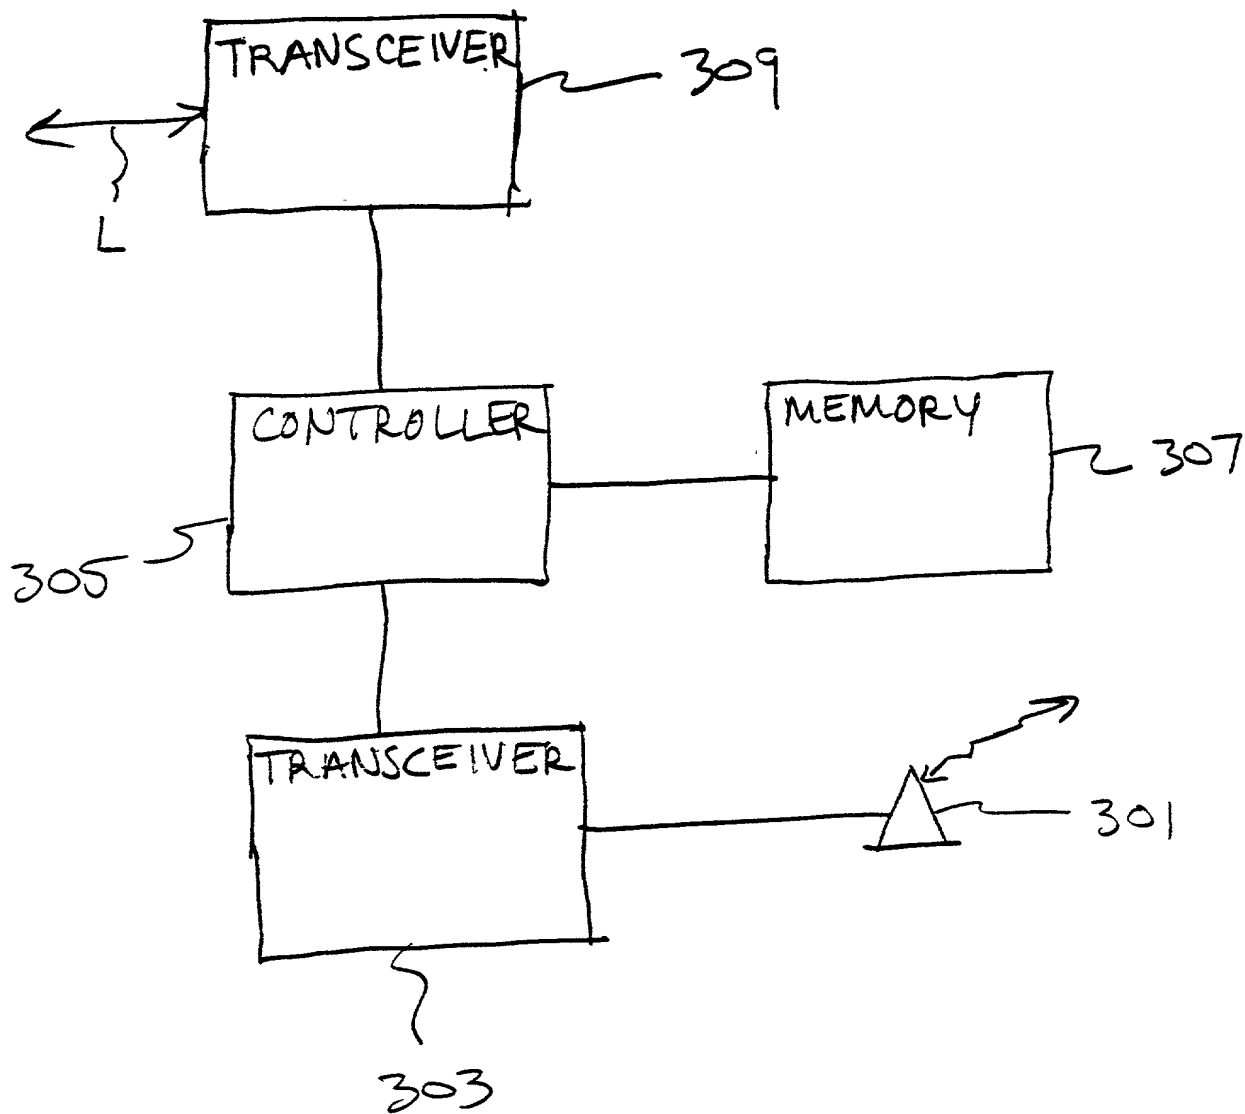


FIG. 2

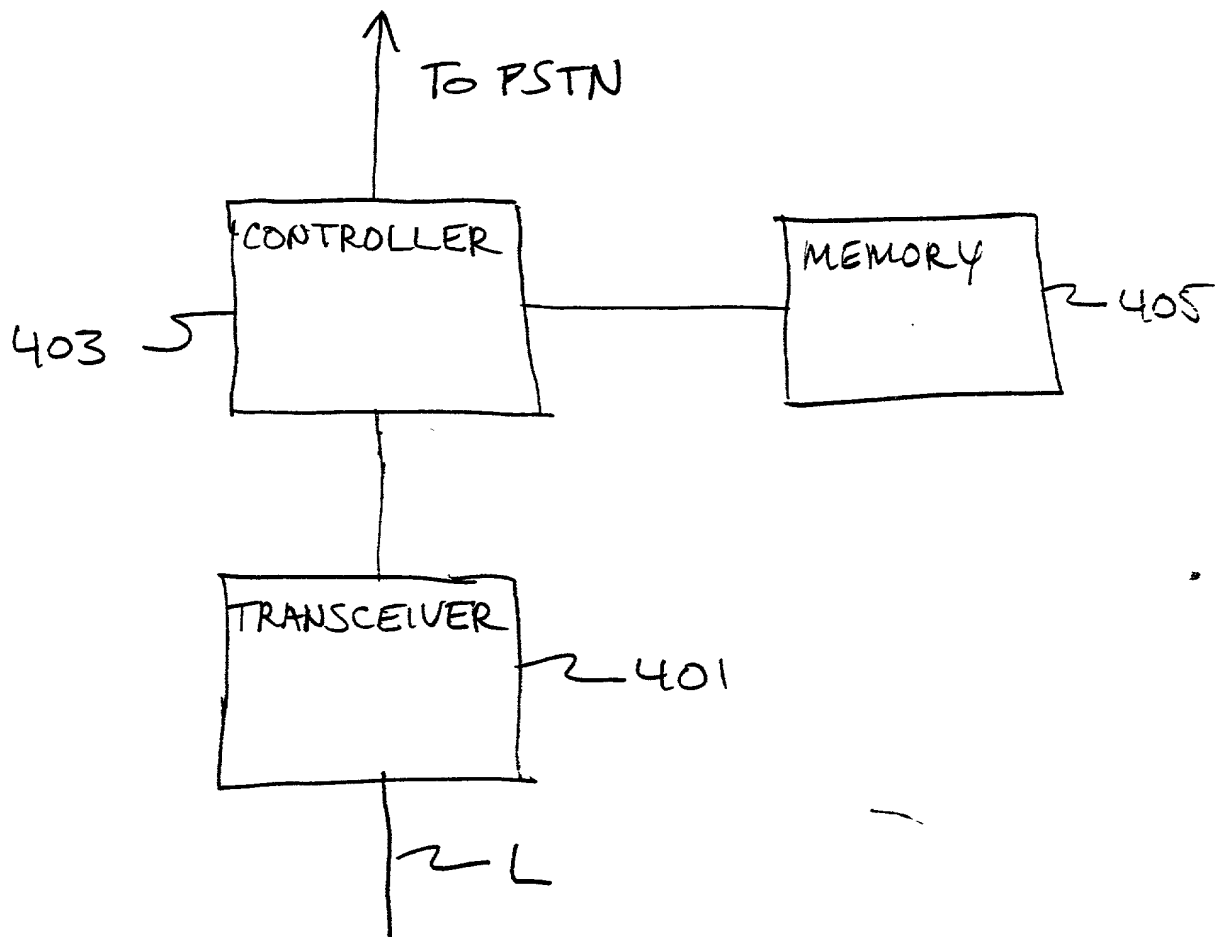


FIG. 3

Case Name and No. Cheng 6-2

**IN THE UNITED STATES  
PATENT AND TRADEMARK OFFICE****Declaration and Power of Attorney**

As the below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled **CDMA POWER CONTROL FOR PAGING AND INITIAL TRAFFIC CHANNEL POWER** the specification of which is attached hereto

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

00163796 9529760

I hereby appoint the following attorney(s) with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

Lester H. Birnbaum	(Reg. No. 25830)
Richard J. Botos	(Reg. No. 32016)
Jeffery J. Brosemer	(Reg. No. 36096)
Kenneth M. Brown	(Reg. No. 37590)
Donald P. Dinella	(Reg. No. 39961)
Guy Eriksen	(Reg. No. P-41736)
Martin I. Finston	(Reg. No. 31613)
James H. Fox	(Reg. No. 29379)
Barry H. Freedman	(Reg. No. 26166)
Julio A. Garceran	(Reg. No. 37138)
Mony R. Ghose	(Reg. No. 38159)
Jimmy Goo	(Reg. No. 36528)
Anthony Grillo	(Reg. No. 36535)
Stephen M. Gurey	(Reg. No. 27336)
John M. Harman	(Reg. No. 38173)
Donald E. Hayes, Jr.	(Reg. No. 33245)
John W. Hayes	(Reg. No. 33900)
Mark A. Kurisko	(Reg. No. 38944)
Irena Lager	(Reg. No. 39260)
Christopher N. Malvone	(Reg. No. 34866)
Scott W. McLellan	(Reg. No. 30776)
Martin G. Meder	(Reg. No. 34674)
Geraldine Monteleone	(Reg. No. 40097)
John C. Moran	(Reg. No. 30782)
Michael A. Morra	(Reg. No. 28975)
Gregory J. Murgia	(Reg. No. 41209)
Claude R. Narcisse	(Reg. No. 38979)
Joseph J. Opalach	(Reg. No. 36229)
Neil R. Ormos	(Reg. No. 35309)
Eugen E. Pacher	(Reg. No. 29964)
Jack R. Penrod	(Reg. No. 31864)
Daniel J. Piotrowski	(Reg. No. P-42079)
Gregory C. Ranieri	(Reg. No. 29695)
Scott J. Rittman	(Reg. No. 39010)
Eugene J. Rosenthal	(Reg. No. 36658)
Bruce S. Schneider	(Reg. No. 27949)
Ronald D. Slusky	(Reg. No. 26585)
David L. Smith	(Reg. No. 30592)
Patricia A. Verlangieri	(Reg. No. P-42201)

09/30/98 11:52 FAX



3

Case Name and No. Cheng 6-2

John P. Veschi	(Reg. No. 39058)
David Volejnicek	(Reg. No. 29355)
Charles L. Warren	(Reg. No. 27407)
Eli Weiss	(Reg. No. 17765)

I hereby appoint the attorney(s) on ATTACHMENT A as associate attorney(s) in the aforementioned application, with full power solely to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected with the prosecution of said application. No other powers are granted to such associate attorney(s) and such associate attorney(s) are specifically denied any power of substitution or revocation.

Full name of 1st joint inventor: Terry Si-Fong CHENG

Inventor's signature  Date 9/30/98

Residence: Randolph, New Jersey

Citizenship: USA

Post Office Address: 20 Sparrow Road  
Randolph, New Jersey 07869

Full name of 2nd joint inventor: Ching Yao HUANG

Inventor's signature  Date 9/30/98

Residence: Randolph, New Jersey

Citizenship: Taiwan

Post Office Address: 18 Hillcrest Drive, Randolph, New Jersey 07869

**ATTACHMENT A**

Attorney Name(s):	<u>Raymond C. Stewart</u>	Reg. No.:	<u>21,066</u>
	<u>Joseph A. Kolasch</u>		<u>22,463</u>
	<u>James M. Slattery</u>		<u>28,380</u>
	<u>Donald J. Daley</u>		<u>34,313</u>
	<u>John A. Castellano</u>		<u>35,094</u>

Telephone calls should be made to Birch Stewart Kolasch & Birch, LLP at:

Phone No.: (703) 205-8000

Fax No.: (703) 205-8050

All written communications are to be addressed to:

**BIRCH, STEWART, KOLASCH & BIRCH, LLP,**  
P.O. BOX 747  
Falls Church, Virginia 22040-0747